


**TriAngles™ 3D Scanner**  
**Laser Support Stand Assembly Instructions V1**



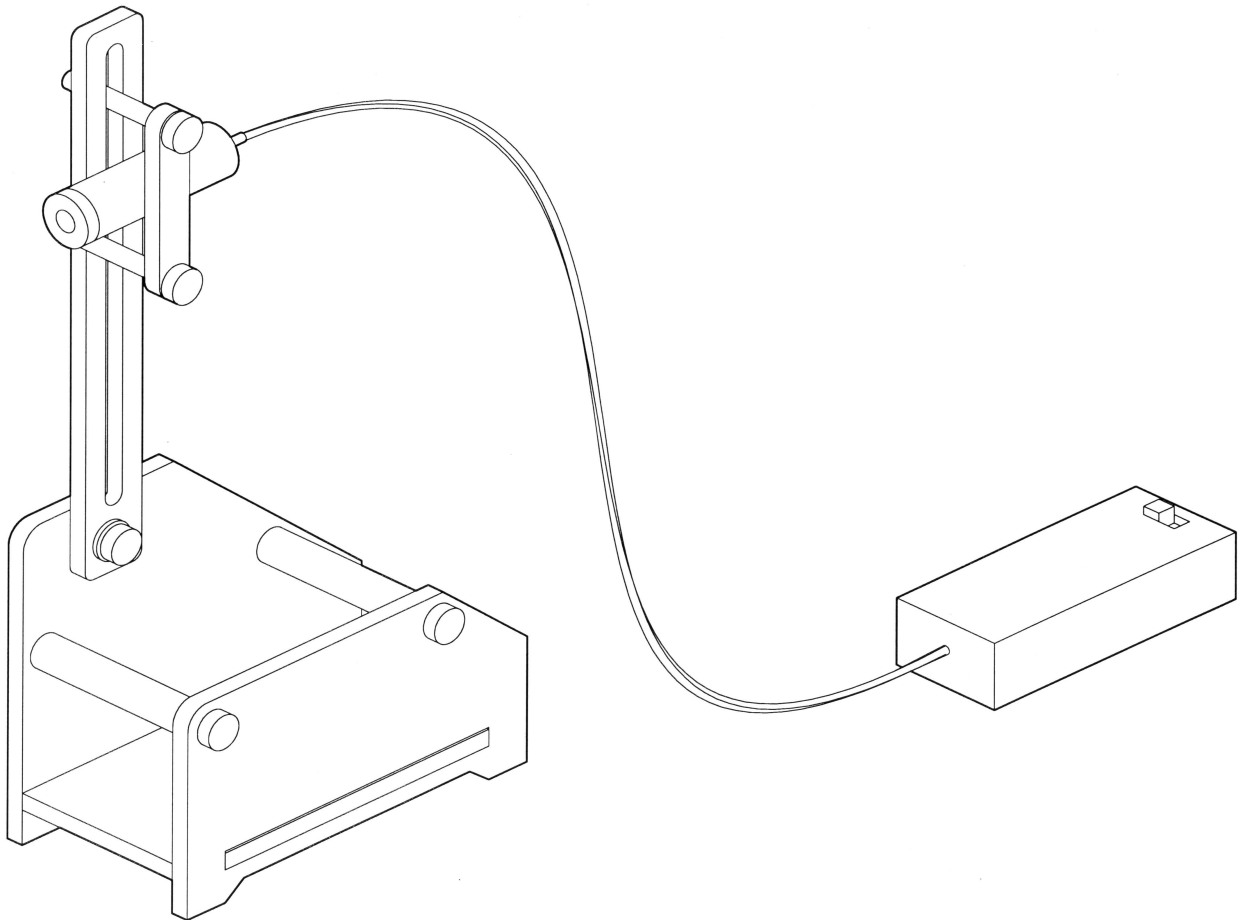

## Disclaimer

**Tri Angles 3D Scanner Laser Support Stand Version 1 PUBLICATION**  
**Tri Angles 3D Scanner Laser Support Stand Version 1 DESIGN**  
**Copyright © 2007 IntriCAD NL**

This software and publication pertains to the workings, manufacturing, assembly and operation of a machine apparatus. This can be a dangerous undertaking. The use of this software and any information provided is therefore at the users own risk.

In no event shall the author and owner IntriCAD, suppliers nor any related parties that contributed to the creation, marketing and sale of this publication be liable to any party for any direct, indirect, special, punitive or consequential damages (including but not limited to, damages to property, business, person(s), or other pecuniary or loss or claims suits or causes of action involving alleged infringement of copyrights, patents, trademarks, trade secrets, or unfair competition), arising out of the availability, use, reliance on, or inability to use the information contained in this publication.

In addition this applies to any accompanying or further information provided by any means, or any other damage that may result in any way whatsoever, even if this organization or owner shall have been advised of the possibility of such damages, and regardless of the form of action, whether in contract, tort, or otherwise, or for any claim attributed to errors, omissions, or any other inaccuracies in, or destructive properties of any information and/or software/hardware material. The author and owner of this software is under no obligation to provide support, service, corrections, or upgrades to the software programs. This software is supplied "as is" and no warranty of any kind is attributed to it.

It is the responsibility of the reader of this publication and/or user of the included software to determine the integrity and required safety precautions regarding the fabrication techniques, electrical circuits, mechanical construction and software which are described, explained and provided in this Publication and/or software. This project is only for adults with basic understanding of electronics and home machining skills. It is certainly not for children and should be kept out of their reach. If the reader lacks the required skill and/or knowledge to produce and/or operate the apparatus described then he/she should not proceed with this project or should seek professional engineering assistance.

The information and software supplied is for educational purposes and not intended for commercial use. Extensive effort has been undertaken to insure that the information contained in this manual and the supplied software does not breach any currently protected art nor intellectual property. To the best of our knowledge it does not as it is based on technology/art that is now become public domain. However given current practices in industry this cannot be fully ascertained. Use of this software for commercial purposes is at the users own risk.

By proceeding to read or use the information contained in this publication and/or software the user agrees to the above stated.

**TriAngles 3D Scanner**, Version 1 IntriCAD  
**TriAngles; 3D Scanner, 3D Builder and 3D Viewer** by IntriCAD


All rights reserved. Information subject to change without notice.

## **Table of Contents**

<b>1. Introduction</b>	<b>4</b>
<b>2. Tools</b>	<b>5</b>
<b>3. Parts List</b>	<b>5</b>
<b>4. General Guidelines</b>	<b>6</b>
<b>5. Soldering the Laser Leads to the Battery Enclosure</b>	<b>6</b>
<b>6. Assembly</b>	<b>6</b>
<b>7. Adjusting the Laser</b>	<b>7</b>

## **1. Introduction**

The Laser Support Stand is a simple construction that supports the positioning of an adjustable focus laser module. A small battery holder with switch supplies the laser module with power. The battery holder is not attached to the support stand. This is done in order to prevent moving of the support stand from an aligned position when switching the laser on or off.

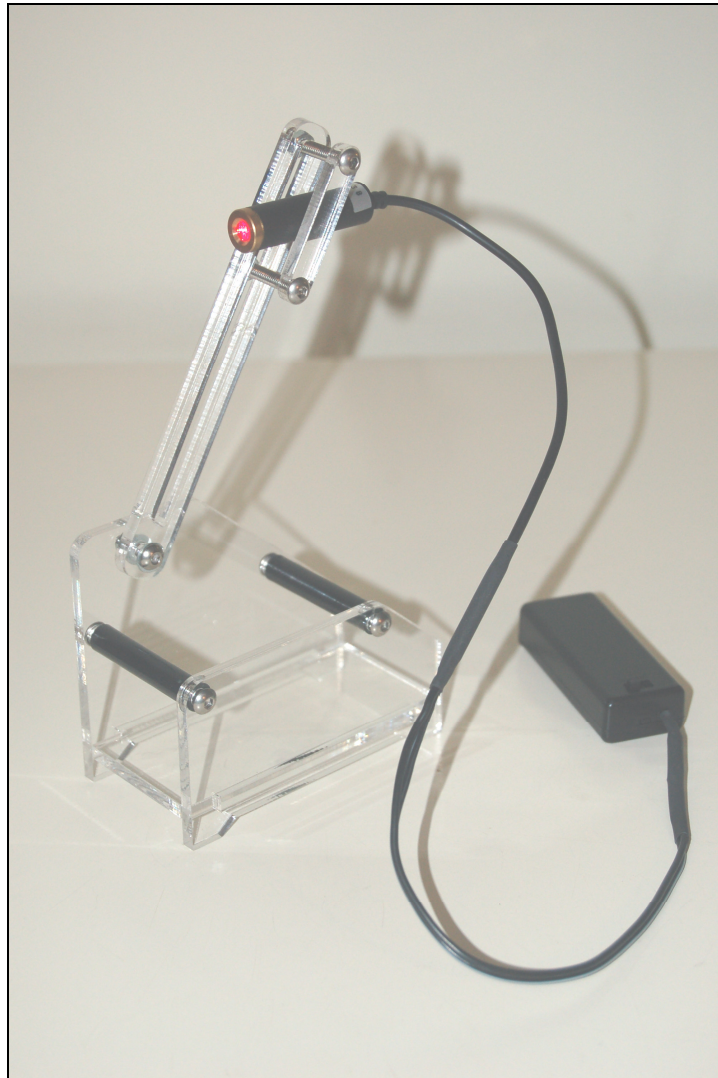

**Adjustable Focus Laser supplied by Apinex  
LML 3mW, 635nm  
[www.apinex.com](http://www.apinex.com)**

**Do Not Look Into Laser Beam**

## 2. Tools


1. Wire Stripper
2. Soldering Iron (sharp tip)
3. Solder (for electronics)
4. Small pliers
5. Lighter (for shrink tube)

## 3. Parts List


**1x 4A**



**1x 1A**




**1x 2A**




**1x 5A**



**1x 3A**




**1x C1**



**2x C3**



**1x C2**



**4x F1**



**1x F2**



**2x F5**




**1x F3**



**2x F4**



**2x Batt1**





Qty.	Part	Name	Size (mm)	Remark
1	1A	Base Plate		
1	2A	Support Plate		
1	3A	Side Plate		
1	4A	Support Bracket		
1	5A	Clamp Bracket		
1	C1	Focus Adjustable Laser		
1	C2	Battery Enclosure	AA	
2	C3	Threaded Spacer (black stand-off)	M4 x 40	
4	F1	Bolt	M4 x 12	
1	F2	Bolt	6-32X1/2	
3	F3	Nut	6-32	
2	F4	Washer	#6	
2	F5	Bolt	6-32X1	
2	Batt1	Battery	AA	Not Included

#### 4. General Guidelines

3 main aspects must be observed during assembly:


1. The panel material is supplied with a protective layer. This should be removed only when necessary. The base material is not scratch-resistant.
2. Handle the laser with care. Avoid looking into the laser beam.
3. Before assembly it is advised to first read through the instructions carefully as well as lay all major parts in position.

#### 5. Soldering the Laser Leads to the Battery Enclosure


Remove about 5mm of insulation from the leads of the laser (C1) and battery enclosure (C2). Tin all leads with solder using a solder iron. Cut 4 10mm pieces of shrink tube and slide one over each lead. Hold 2 leads of same color together and solder. Make sure the shrink tube does not get too close to the soldering or the heat will shrink it. Do the same for the rest of the leads.

#### 6. Assembly

Peel the protective layer off of the Support Plate (2A) and using bolts (F1) screw on the 2 40mm black stand off's (C3). Place the Base Plate (1A) into the slot of the Support Plate (2A) and the slot of the Side Plate (3A) on the other side of the Base Plate. Use bolts (F1) to fasten the assembly. Attach the Support Bracket (4A) using bolt (F2), washers (F4) and nut (F3) to the Support Plate (2A).

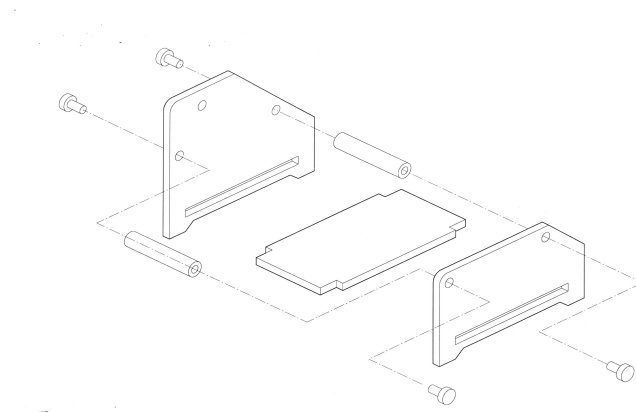

Clamp the laser (C1) to the Support Bracket (4A) using the Clamp Bracket (5A) and bolts (F5) and nuts (F3). Do not clamp too tight as this can damage the laser. The clamping force should be enough to hold the laser in a fixed position while still allowing adjustment to be made.

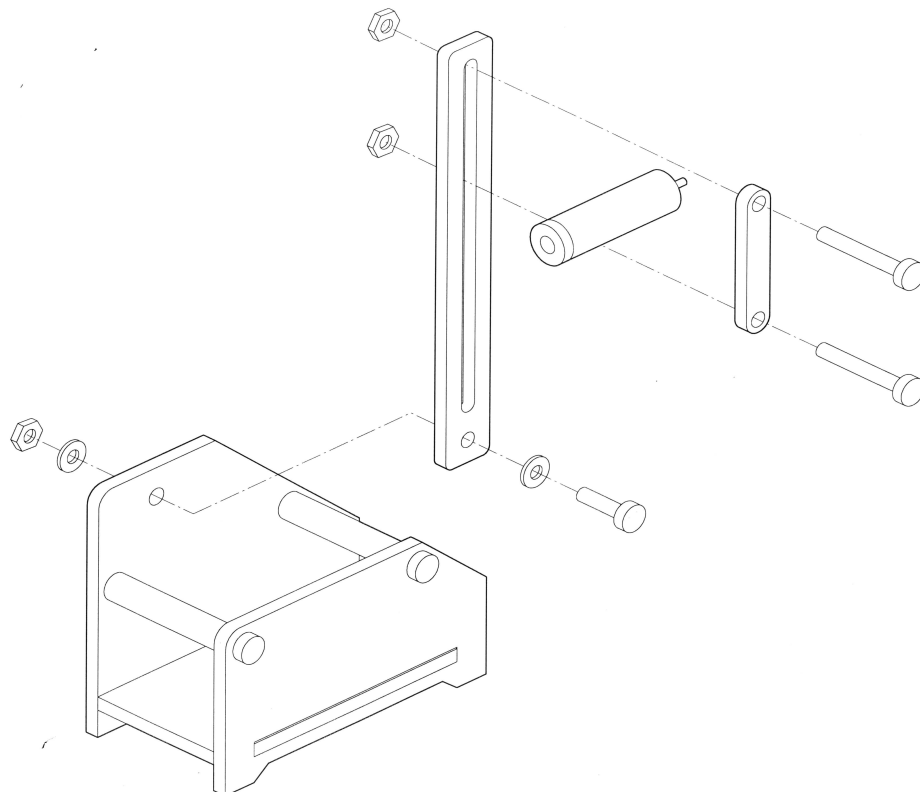

## 7. Adjusting the Laser



The laser support stand is usually positioned at about 400 mm from the turn table. The laser line should be focused to the thinnest possible line at this distance. The line should also be perfectly vertical. It is important that this be done as accurately as possible to insure good scanning results.

The supplied laser allows focusing by gently turning the brass front piece. Position the support stand at about 400mm from a wall and turn the brass piece until the thinnest possible line thickness is attained. The black cylinder portion of the laser must be held in position during focusing.

To set the line vertically, stick a piece of paper on a wall and using a pencil and Level Set draw a straight vertical line on it. Move the support stand back to about 3-4 meters and adjust the position of the laser line by turning the black laser cylinder until it lines up with the drawn line. It is presumed that the floor or table that the Laser Stand is standing on is flat and leveled as well.